



Arden 3 Dimming Type

Surface ceiling luminaires


Project :	Location :	Type :	Quantity :
Note :			



Luminaire Structure

Impressive array of sophisticated workplace ambient panels Beautiful retro-contemporary interior lighting from LIGMAN.

Light Symbol



Down light

Ordering guide sample

ARD-80201 - O - W30 - DA - A90291
Diffuser Colour Dim Type Accessory 1

Diffuser for light output control
O - Opal diffuser UGR <19
P - Micro-prismatic UGR <13

Dimming Type
ND - Non dimmable
DI - 1-10V dimmable
DA - DALI dimmable

Colour Temperature
W27 - Warm 2700K
W30 - Warm white 3000K
W40 - Neutral white 4000K
W50 - Cool white 5000K


Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Remote Driver For (DI) 1-10V dimmable	Weight kg		
	UP	DOWN					L1	L2				
SURFACE CEILING MOUNTED · DOWN LIGHT · DIMMING TYPE · OPAL DIFFUSER												
ARD-80201	- O -	W27	—	168 LED	15	1578	2700K	A++	315	170	—	2.8
ARD-80201	- O -	W30	—	168 LED	15	1651	3000K	A++	315	170	—	2.8
ARD-80201	- O -	W40	—	168 LED	15	1723	4000K	A++	315	170	—	2.8
ARD-80201	- O -	W50	—	168 LED	15	1795	5000K	A++	315	170	—	2.8
ARD-80202	- O -	W27	—	168 LED	21	2240	2700K	A++	315	170	—	2.8
ARD-80202	- O -	W30	—	168 LED	21	2342	3000K	A++	315	170	—	2.8
ARD-80202	- O -	W40	—	168 LED	21	2445	4000K	A++	315	170	—	2.8
ARD-80202	- O -	W50	—	168 LED	21	2547	5000K	A++	315	170	—	2.8
ARD-80211	- O -	W27	—	288 LED	27	2889	2700K	A++	375	220	—	3.8
ARD-80211	- O -	W30	—	288 LED	27	3022	3000K	A++	375	220	—	3.8
ARD-80211	- O -	W40	—	288 LED	27	3154	4000K	A++	375	220	—	3.8
ARD-80211	- O -	W50	—	288 LED	27	3285	5000K	A++	375	220	—	3.8
ARD-80212	- O -	W27	—	288 LED	38	4122	2700K	A++	375	220	—	3.8
ARD-80212	- O -	W30	—	288 LED	38	4311	3000K	A++	375	220	—	3.8
ARD-80212	- O -	W40	—	288 LED	38	4500	4000K	A++	375	220	—	3.8
ARD-80212	- O -	W50	—	288 LED	38	4687	5000K	A++	375	220	—	3.8
ARD-80221	- O -	W27	—	480 LED	41	5042	2700K	A++	480	300	✓	5.6
ARD-80221	- O -	W30	—	480 LED	41	5273	3000K	A++	480	300	✓	5.6
ARD-80221	- O -	W40	—	480 LED	41	5504	4000K	A++	480	300	✓	5.6
ARD-80221	- O -	W50	—	480 LED	41	5733	5000K	A++	480	300	✓	5.6
ARD-80222	- O -	W27	—	480 LED	59	7180	2700K	A++	480	300	✓	5.6
ARD-80222	- O -	W30	—	480 LED	59	7509	3000K	A++	480	300	✓	5.6
ARD-80222	- O -	W40	—	480 LED	59	7838	4000K	A++	480	300	✓	5.6
ARD-80222	- O -	W50	—	480 LED	59	8164	5000K	A++	480	300	✓	5.6

Optional diffuser



(-O) Opal diffuser UGR <19



(-P) Micro-prismatic diffuser UGR <13

Dimming Type

ND DI DA

Colour Code

- 01 Black RAL 9011 - 03 White RAL 9003 - 05 Matt Silver RAL 9006

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Arden 3 Dimming Type

Surface ceiling luminaires


Project :	Location :	Type :	Quantity :
Note :			

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Remote Driver For (DI) 1-10V dimmable	Weight kg		
	UP	DOWN					L1	L2				
SURFACE CEILING MOUNTED · DOWN LIGHT · DIMMING TYPE · OPAL DIFFUSER												
ARD-80231	- O -	W27	—	672 LED	49	6090	2700K	A++	595	300	✓	7.4
ARD-80231	- O -	W30	—	672 LED	49	6370	3000K	A++	595	300	✓	7.4
ARD-80231	- O -	W40	—	672 LED	49	6649	4000K	A++	595	300	✓	7.4
ARD-80231	- O -	W50	—	672 LED	49	6926	5000K	A++	595	300	✓	7.4
ARD-80232	- O -	W27	—	672 LED	73	9056	2700K	A++	595	300	✓	7.4
ARD-80232	- O -	W30	—	672 LED	73	9472	3000K	A++	595	300	✓	7.4
ARD-80232	- O -	W40	—	672 LED	73	9887	4000K	A++	595	300	✓	7.4
ARD-80232	- O -	W50	—	672 LED	73	10298	5000K	A++	595	300	✓	7.4
ARD-80241	- O -	W27	—	1512 LED	108	13599	2700K	A++	875	450	—	14.6
ARD-80241	- O -	W30	—	1512 LED	108	14222	3000K	A++	875	450	—	14.6
ARD-80241	- O -	W40	—	1512 LED	108	14846	4000K	A++	875	450	—	14.6
ARD-80241	- O -	W50	—	1512 LED	108	15464	5000K	A++	875	450	—	14.6
ARD-80242	- O -	W27	—	1512 LED	162	20338	2700K	A++	875	450	—	14.6
ARD-80242	- O -	W30	—	1512 LED	162	21270	3000K	A++	875	450	—	14.6
ARD-80242	- O -	W40	—	1512 LED	162	22203	4000K	A++	875	450	—	14.6
ARD-80242	- O -	W50	—	1512 LED	162	23127	5000K	A++	875	450	—	14.6

SURFACE CEILING MOUNTED · DOWN LIGHT · DIMMING TYPE: MICRO-PRISMATIC DIFFUSER												
ARD-80201	- P -	W27	—	168 LED	15	1439	2700K	A++	315	170	—	2.8
ARD-80201	- P -	W30	—	168 LED	15	1505	3000K	A++	315	170	—	2.8
ARD-80201	- P -	W40	—	168 LED	15	1571	4000K	A++	315	170	—	2.8
ARD-80201	- P -	W50	—	168 LED	15	1636	5000K	A++	315	170	—	2.8
ARD-80202	- P -	W27	—	168 LED	21	2039	2700K	A++	315	170	—	2.8
ARD-80202	- P -	W30	—	168 LED	21	2133	3000K	A++	315	170	—	2.8
ARD-80202	- P -	W40	—	168 LED	21	2226	4000K	A++	315	170	—	2.8
ARD-80202	- P -	W50	—	168 LED	21	2319	5000K	A++	315	170	—	2.8
ARD-80211	- P -	W27	—	288 LED	27	2698	2700K	A++	375	220	—	3.8
ARD-80211	- P -	W30	—	288 LED	27	2821	3000K	A++	375	220	—	3.8
ARD-80211	- P -	W40	—	288 LED	27	2945	4000K	A++	375	220	—	3.8
ARD-80211	- P -	W50	—	288 LED	27	3067	5000K	A++	375	220	—	3.8
ARD-80212	- P -	W27	—	288 LED	38	3859	2700K	A++	375	220	—	3.8
ARD-80212	- P -	W30	—	288 LED	38	4036	3000K	A++	375	220	—	3.8
ARD-80212	- P -	W40	—	288 LED	38	4213	4000K	A++	375	220	—	3.8
ARD-80212	- P -	W50	—	288 LED	38	4389	5000K	A++	375	220	—	3.8
ARD-80221	- P -	W27	—	480 LED	41	4595	2700K	A++	480	300	✓	5.6
ARD-80221	- P -	W30	—	480 LED	41	4805	3000K	A++	480	300	✓	5.6
ARD-80221	- P -	W40	—	480 LED	41	5016	4000K	A++	480	300	✓	5.6
ARD-80221	- P -	W50	—	480 LED	41	5225	5000K	A++	480	300	✓	5.6
ARD-80222	- P -	W27	—	480 LED	59	6556	2700K	A++	480	300	✓	5.6
ARD-80222	- P -	W30	—	480 LED	59	6857	3000K	A++	480	300	✓	5.6
ARD-80222	- P -	W40	—	480 LED	59	7157	4000K	A++	480	300	✓	5.6
ARD-80222	- P -	W50	—	480 LED	59	7455	5000K	A++	480	300	✓	5.6
ARD-80231	- P -	W27	—	672 LED	49	5594	2700K	A++	595	300	✓	7.4
ARD-80231	- P -	W30	—	672 LED	49	5851	3000K	A++	595	300	✓	7.4
ARD-80231	- P -	W40	—	672 LED	49	6107	4000K	A++	595	300	✓	7.4
ARD-80231	- P -	W50	—	672 LED	49	6361	5000K	A++	595	300	✓	7.4
ARD-80232	- P -	W27	—	672 LED	73	8322	2700K	A++	595	300	✓	7.4
ARD-80232	- P -	W30	—	672 LED	73	8704	3000K	A++	595	300	✓	7.4
ARD-80232	- P -	W40	—	672 LED	73	9085	4000K	A++	595	300	✓	7.4
ARD-80232	- P -	W50	—	672 LED	73	9463	5000K	A++	595	300	✓	7.4

Accessory For Wireless Bluetooth



xPress Wireless switch (A90591)



Wireless Bluetooth (A90291)

* Installation manual available online at www.ligman.com.

* Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.

* Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Arden 3 Dimming Type


Surface ceiling luminaires

Project :	Location :	Type :	Quantity :
Note :			

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Remote Driver For (DI) 1-10V dimmable	Weight kg
	UP	DOWN					L1	L2		
SURFACE CEILING MOUNTED · DOWN LIGHT · DIMMING TYPE: MICRO-PRISMATIC DIFFUSER										
ARD-80241 - P - W27	—	1512 LED	108	12076	2700K	A++	875	450	—	14.6
ARD-80241 - P - W30	—	1512 LED	108	12630	3000K	A++	875	450	—	14.6
ARD-80241 - P - W40	—	1512 LED	108	13184	4000K	A++	875	450	—	14.6
ARD-80241 - P - W50	—	1512 LED	108	13732	5000K	A++	875	450	—	14.6
ARD-80242 - P - W27	—	1512 LED	162	18081	2700K	A++	875	450	—	14.6
ARD-80242 - P - W30	—	1512 LED	162	18910	3000K	A++	875	450	—	14.6
ARD-80242 - P - W40	—	1512 LED	162	19739	4000K	A++	875	450	—	14.6
ARD-80242 - P - W50	—	1512 LED	162	20561	5000K	A++	875	450	—	14.6

Photometric

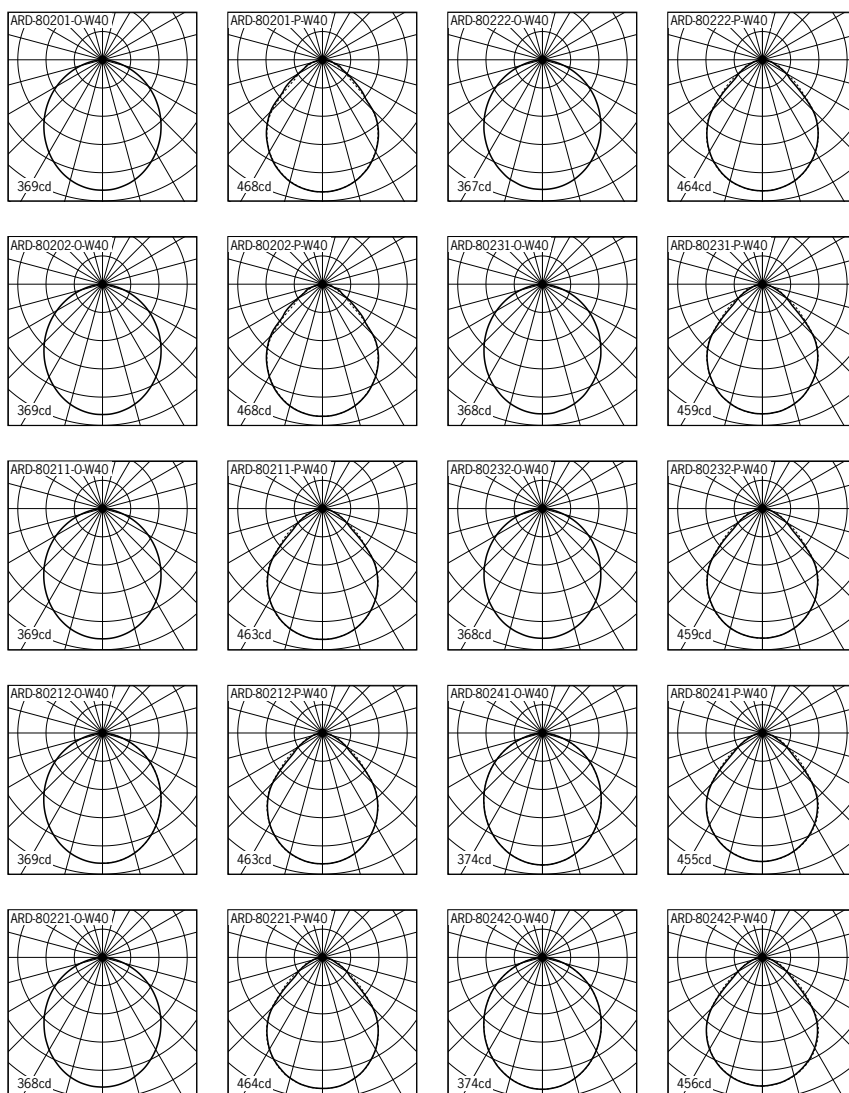

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com




Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Arden 3 Tunable White

Surface ceiling luminaires

Project :	Location :	Type :	Quantity :
Note :			



Luminaire Structure

Impressive array of sophisticated workplace ambient panels Beautiful retro-contemporary interior lighting from LIGMAN.

Light Symbol



Down light

Ordering guide sample

ARD-80103 - O - TUV - A90291	Diffuser for light output control O - Opal diffuser UGR <19 P - Micro-prismatic UGR <13	Colour Temperature TUV - Tunable white 2700K - 6500K
Diffuser	Colour	Accessory 1

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Weight kg
	UP	DOWN					L1	L2	


SURFACE CEILING MOUNTED · DOWN LIGHT · TUNABLE WHITE · OPAL DIFFUSER

ARD-80203 - O - TUV	—	336 LED	18	2008	TUV	A++	315	170	2.8
ARD-80213 - O - TUV	—	576 LED	29	3456	TUV	A++	375	220	3.8
ARD-80223 - O - TUV	—	960 LED	47	5951	TUV	A++	480	300	5.6
ARD-80233 - O - TUV	—	1344 LED	67	9295	TUV	A++	595	300	7.4
ARD-80243 - O - TUV	—	3024 LED	151	20913	TUV	A++	875	450	14.6


SURFACE CEILING MOUNTED · DOWN LIGHT · TUNABLE WHITE · MICRO-PRISMATIC DIFFUSER

ARD-80203 - P - TUV	—	336 LED	18	1723	TUV	A++	315	170	2.3
ARD-80213 - P - TUV	—	576 LED	29	3041	TUV	A++	375	220	3.3
ARD-80223 - P - TUV	—	960 LED	47	5281	TUV	A++	480	300	4.9
ARD-80233 - P - TUV	—	1344 LED	67	7924	TUV	A++	595	300	6.4
ARD-80243 - P - TUV	—	3024 LED	151	17828	TUV	A++	875	450	12.7

Optional diffuser


(- O)
Opal diffuser
UGR <19

(- P)
Micro-prismatic
diffuser
UGR <13

Accessory For Wireless Bluetooth


xPress Wireless
switch
(A90591)

Wireless
Bluetooth
(A90291)

Colour Code

- 01	- 03	- 05
Black RAL 9011	White RAL 9003	Matt Silver RAL 9006

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Arden 3 Tunable White

Surface ceiling luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

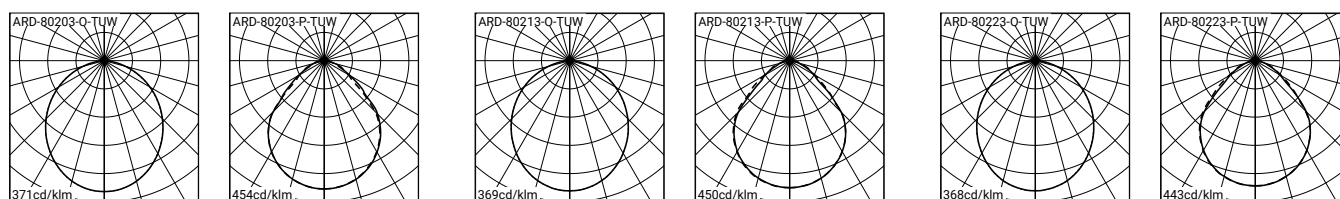

• Installation manual available online at www.ligman.com.

• Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
• Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com



Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Arden 3 RGBW Wireless Bluetooth

Surface ceiling luminaires

Project :	Location :	Type :	Quantity :
Note :			



Luminaire Structure

Impressive array of sophisticated workplace ambient panels Beautiful retro-contemporary interior lighting from LIGMAN.

Light Symbol




Ordering guide sample

ARD-80204	- O -	RGBW40	- A90591	Diffuser for light output control O - Opal diffuser UGR <19 P - Micro-prismatic UGR <13	Colour Temperature W40 - Neutral white 4000K RGBW
	Diffuser	Colour	Accessory		

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Remote Driver	Weight kg		
	UP	DOWN					L1	L2				
SURFACE CEILING MOUNTED · DOWN LIGHT · RGBW WIRELESS BLUETOOTH · OPAL DIFFUSER												
ARD-80204	- O -	RGBW	—	672 LED	34	635	RGBW40	A++	315	170	✓	2.8
ARD-80214	- O -	RGBW	—	1152 LED	36	1089	RGBW40	A++	375	220	✓	3.8
ARD-80224	- O -	RGBW	—	1920 LED	60	1815	RGBW40	A++	480	300	✓	5.6
ARD-80234	- O -	RGBW	—	2688 LED	84	2541	RGBW40	A++	595	300	✓	7.4
ARD-80244	- O -	RGBW	—	6048 LED	189	5716	RGBW40	A++	875	450	—	14.6
SURFACE CEILING MOUNTED · DOWN LIGHT · RGBW WIRELESS BLUETOOTH · MICRO-PRISMATIC DIFFUSER												
ARD-80204	- P -	RGBW	—	672 LED	34	541	RGBW40	A++	315	170	✓	2.8
ARD-80214	- P -	RGBW	—	1152 LED	36	928	RGBW40	A++	375	220	✓	3.8
ARD-80224	- P -	RGBW	—	1920 LED	60	1547	RGBW40	A++	480	300	✓	5.6
ARD-80234	- P -	RGBW	—	2688 LED	84	2166	RGBW40	A++	595	300	✓	7.4
ARD-80244	- P -	RGBW	—	6048 LED	189	4873	RGBW40	A++	875	450	—	14.6


Optional diffuser



Colour Temperature

RGBW40

Accessory For Wireless Bluetooth



Colour Code



RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com



Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Arden 3 RGBW DMX

Surface ceiling luminaires


Project :	Location :	Type :	Quantity :
Note :			



Luminaire Structure

Impressive array of sophisticated workplace ambient panels Beautiful retro-contemporary interior lighting from LIGMAN.

Light Symbol



Down light

Ordering guide sample

ARD-80205	- O -	RGBW40	- A60491	Diffuser for light output control	Colour Temperature
				O - Opal diffuser UGR <19	W40 - Neutral white 4000K
				P - Micro-prismatic UGR < 13	RGBW

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Remote Driver	Weight kg
	UP	DOWN					L1	L2		

SURFACE CEILING MOUNTED · DOWN LIGHT · RGBW DMX · OPAL DIFFUSER

ARD-80205	- O -	RGBW	—	672 LED	34	635	RGBW40	A++	315	170	✓	2.8
ARD-80215	- O -	RGBW	—	1152 LED	36	1089	RGBW40	A++	375	220	✓	3.8
ARD-80225	- O -	RGBW	—	1920 LED	60	1815	RGBW40	A++	480	300	✓	5.6
ARD-80235	- O -	RGBW	—	2688 LED	84	2541	RGBW40	A++	595	300	✓	7.4
ARD-80245	- O -	RGBW	—	6048 LED	189	5716	RGBW40	A++	875	450	—	14.6


SURFACE CEILING MOUNTED · DOWN LIGHT · MICRO-PRISMATIC DIFFUSER

ARD-80205	- P -	RGBW	—	672 LED	34	541	RGBW40	A++	315	170	✓	2.8
ARD-80215	- P -	RGBW	—	1152 LED	36	928	RGBW40	A++	375	220	✓	3.8
ARD-80225	- P -	RGBW	—	1920 LED	60	1547	RGBW40	A++	480	300	✓	5.6
ARD-80235	- P -	RGBW	—	2688 LED	84	2166	RGBW40	A++	595	300	✓	7.4
ARD-80245	- P -	RGBW	—	6048 LED	189	4873	RGBW40	A++	875	450	—	14.6

Optional diffuser



(- O)
Opal diffuser
UGR <19



(- P)
Micro-prismatic
diffuser
UGR <13

Colour Temperature

RGBW40

DMX Accessory



SLESA-U9
(A60491)



SLESA-UE7
(A60691)



STICK-KE1
(A60791)

Colour Code

- 01	- 03	- 05
Black RAL 9011	White RAL 9003	Matt Silver RAL 9006

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.