



TRAILING EDGE Dimmers

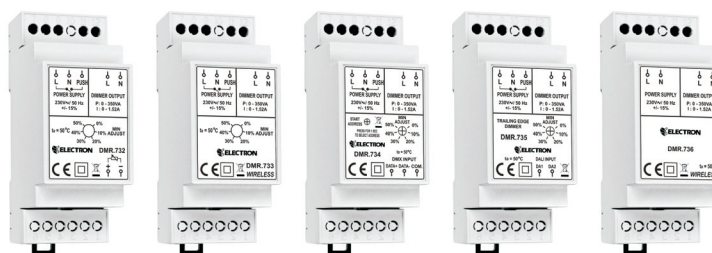
DMR.732, DMR.733, DMR.734, DMR.735, DMR.736

Economic solution for controlling:

- Dimmable LEDs 230V
- Dimmable CFLs
- Dimmable Electronic transformers

Features

- Supports "Aller Retour" between Push Button(s) & 1/10V or Wireless or DMX-512 or DALI (except DMR.736).
- Adjustable minimum level.
- Easily fastened to DIN (EN 60715) RAIL.
- Over temperature protection.

Designed & Manufactured
by ELECTRON SA

Code	Power Supply	Power Output	Output Current	Dimming Resolution	Dimming Method	Output Channels	Control
DMR.732	230VAC / 50Hz	350VA	1.52A rms	20000 steps	Trailing Edge	1	1-10V, Push Button(s)
DMR.733	230VAC / 50Hz	350VA	1.52A rms	20000 steps	Trailing Edge	1	Wireless*, Push Button(s)
DMR.734	230VAC / 50Hz	350VA	1.52A rms	20000 steps	Trailing Edge	1	DMX-512, Push Button(s)
DMR.735	230VAC / 50Hz	350VA	1.52A rms	20000 steps	Trailing Edge	1	DALI, Push Button(s)
DMR.736	230VAC / 50Hz	350VA	1.52A rms	20000 steps	Trailing Edge	1	Wireless*

*Bluetooth for DMR.733, DMR.736

CASAMBI



Casambi uses mesh network technology so each Casambi product acts also as a repeater. Longer ranges can be achieved by using multiple Casambi units.

** Range is highly depended on the surrounding and obstacles, such as walls and building materials.



Compatible devices:

iPhone 4S or later, iPad 3 or later, iPod Touch 5th gen or later
Android 4.4 KitKat or later devices produced after 2013 with full BT 4.0 support

app available on:

