
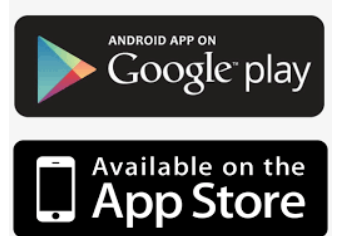


Item name	QDim - Casambi 4CH 0-10V Controller
Ordering code	QDim
Item code	QDIM
Date	28-09-2020

## QDim - Casambi enabled 4ch 0-10V controller

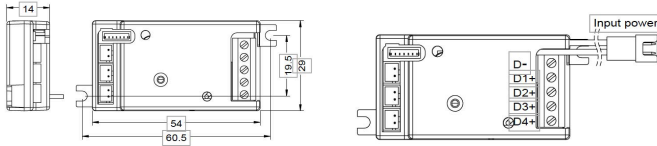

### Description

QDim is Casambi enabled wireless controller of up to 4 channels 0-10V dimmer.  
QDim is controlled through the Casambi App using smartphone or tablet  
QDim output can be connected to CC or CV 0-10V dimmable driver(s)  
Makes it possible to implement multi channel lighting system with adjustable colors RGB/RGBW or tune-able colors while reducing the wiring and components to minimum

### App

QDim can be controlled and configured by Casambi free App.  
Multiple QDim devices can be used in the same area/network

### Installation

QDim can be installed remotely or integrated in a fixtures.  
Qdim work with 12-36VDC class 2 power supply unit.



### Technical Information

Input:	
Power:	12-36VDC 35mA
Output	0-10V dim 1-4ch
Wire Type	14-22AWG
Operating Temp	-20...+45°C
Radio Transceiver	2.401-2.483Ghz
Size (mm)	61x29x14
Size (in)	2.4x1.14x0.5
Weight:	20gr
Device Control:	iOS device - iPod/iPhone/iPad Adroid 4.4 or later devices.
Installation:	Remote or integrated
Ceritificates:	CE, UL Pending
Dim Option:	
1-4 Channels:	1-4 independent channels
2 Channels:	Tuneable White
3 Channels:	RGB
4 Channels:	RGBW

### NOTES:

We reserve the right to change specifications without prior notification.