



| | |
|---------------|-------------------|
| Item name | PWM-5 |
| Ordering code | PWM-5-RGBWA |
| Item code | LEDbyDESIGN PWM-5 |
| Date | 30-09-2020 |

PWM-5 5 Channels PWM DC Controller

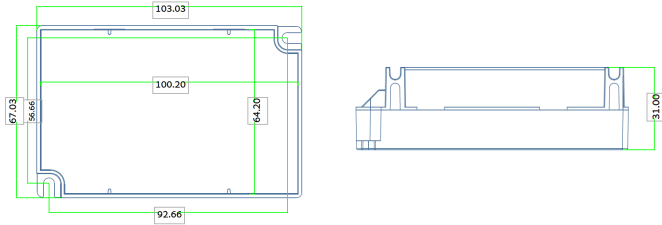

Description

PWM-5 is a Bluetooth controllable, Casambi enabled 5 channel PWM dimmer for constant voltage LED loads, such as LED strips and constant voltage LED modules. It is connected between a 12-24 VDC power supply and the constant voltage LED load. The maximum combined output current is 10 A which can be freely divided between 1 -5 channels. PWM-5 is protected against overload. Flicker Free.

Control

CBU-PWM4 can be controlled with Casambi app which can be downloaded free of charge from Apple App Store and Google Play Store.

Properties

| | |
|---------------------|------------------------------|
| Input Voltage: | 12-24VDC |
| Max. input current: | 10A |
| Output voltage: | Same as Input |
| Max. output power: | 240w @ 24VDC 120w @ 12VDC |
| Device Control: | PWM by Casambi App |
| Case Size: | 103x67x32mm |
| Weight: | 80gr |
| Protection: | IP20 |
| Operating Temp: | -20° to 50°c |
| Installation: | Remote |
| Cnontrol Options: | Avaiable Profiles |
| 1-5 Channels: | 1-5 independent Chennel |
| 2 Channels: | CCT Tuneable White |
| 3 Channels: | RGB |
| 4 Channels : | RGBW |
| 4 Channels: | RGB+White |
| 5 Channels: | RGBTW/RGBWA |
| 5 Channels: | RGB+TW |



NOTES: for more information and user manual please contact: sales@ledbydesign.asia

We reserve the right to change specifications without prior notification.