




Conical Diagram



h (cm)	Ø (cm)	$\gamma=0.0$	$\alpha=\beta=30^{\circ 1}$	E 0°(lx) ²	EC 15°(lx) ³
40	40	$\alpha=\beta$		16700	7515
70	55			8600	3870
100	75	EC (15°) E (0°)		4900	2205






SPINLED R

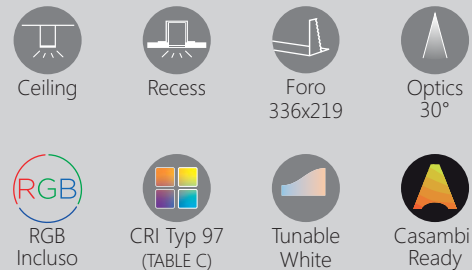



POWER - CRI	
DYNAMIC	
50 Watt - CRI TYP 97	
2700 K + 5700 K	5460lm
LUMINOUS FLUX	
Colour level obtained from the blend: 4000K	

MATERIAL.....aluminium
POWER SUPPLY.....100~240Vac (Remote)
CONTROL SYSTEM.....Casambi/Switches
INTERNATIONAL PROTECTION.....IP20
CERTIFICATIONS.....CE/ROHS
WEIGHT.....1000 g



Tunable White & Rotation

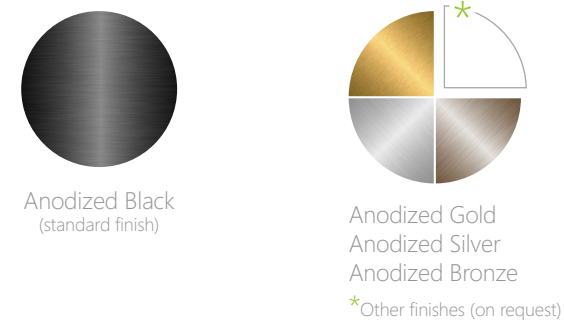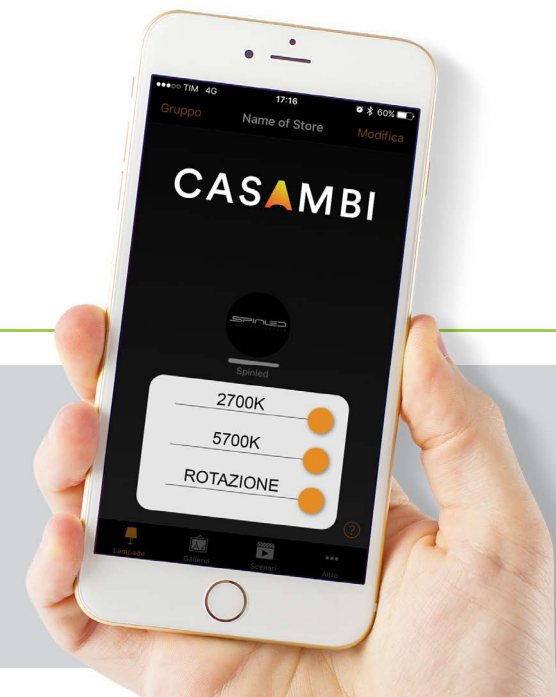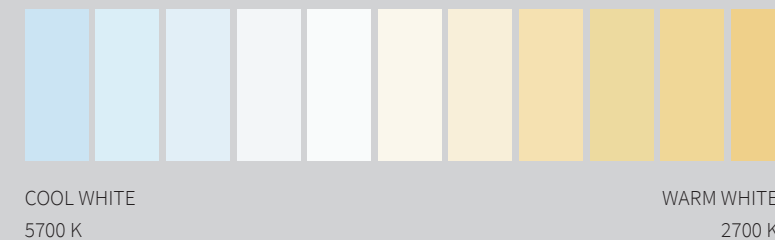

Remote power supply - cables 2mt

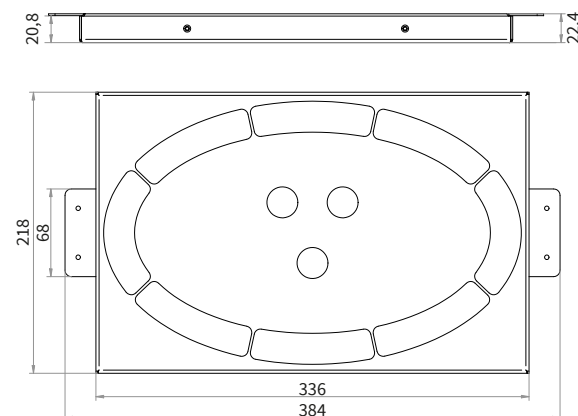

Color Rendering Index & Functionality

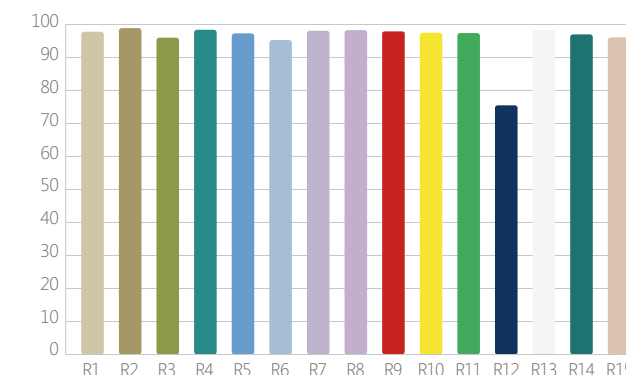

This product with a tunable white Led offers the possibility to change the light colour level, which goes from 2700K to 5700K thanks to the use of CASAMBI APP.