



# Area



[SU MISURA (modularità 500mm) - ON MEASURE]



Ceiling



Hanging



Push/1-10V  
Optional



DALI  
Optional



Casambi  
Optional



UGR <16


## POWER PER METER - POWER SUPPLY - CRI

|        | 15W/mt<br>24Vdc - CRI 80<br>Direct | 38W/mt<br>24Vdc - CRI 80<br>Direct | 15W/mt<br>24Vdc - CRI TYP 90<br>Direct | 38W/mt<br>24Vdc - CRI TYP 90<br>Direct |
|--------|------------------------------------|------------------------------------|----------------------------------------|----------------------------------------|
| 2700 K | 1334 lm/mt                         | 3270 lm/mt                         | 1067 lm/mt                             | 2616 lm/mt                             |
| 3000 K | 1419 lm/mt                         | 3480 lm/mt                         | 1135 lm/mt                             | 2784 lm/mt                             |
| 4000 K | 1607 lm/mt                         | 3940 lm/mt                         | 1285 lm/mt                             | 3152 lm/mt                             |


CCT

LUMINOUS FLUX PER METER


Nero Anodizzato  
Anodized Black





SISTEMA DI FISSAGGIO  
A. Clip Standard




FASTENING SYSTEM  
A. Standard Clip



## Dialux Render

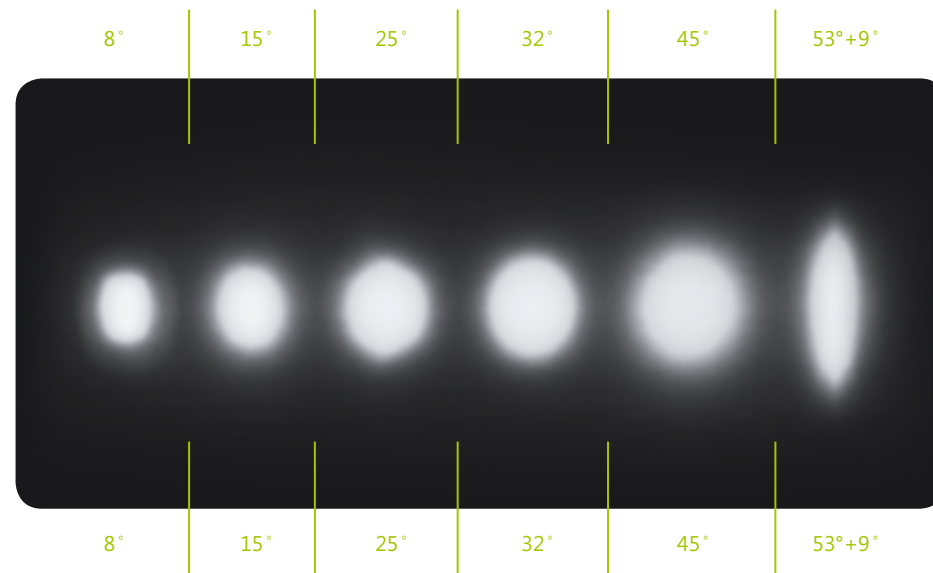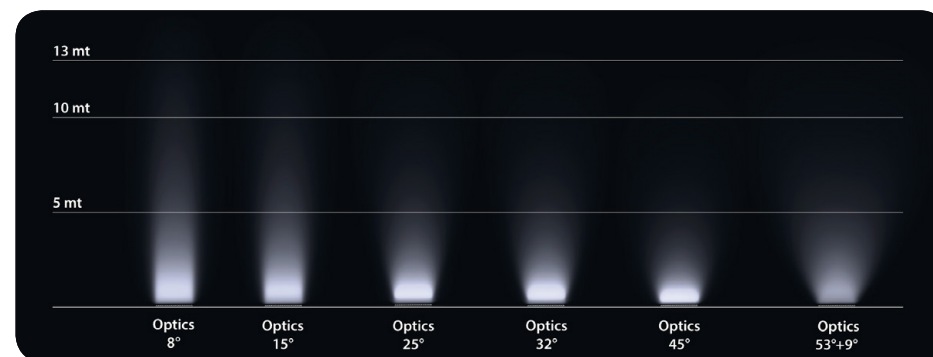

Simulazione Dialux con lampada posizionata a 3 mt (versione 38W)  
Dialux render with lights placed at 3 mt (38W version)



Alluminio  
Anodizzato Nero  
(finitura standard)

Black Anodized  
Aluminum  
(standard finish)



Alluminio Anodizzato:  
- Oro  
- Argento  
- Bronzo  
\*Altre finiture (su richiesta)

Anodized Aluminum:  
- Gold  
- Silver  
- Bronze  
\*Other finishings (on request)

