



Item name	DiMX - Casambi DMX Controller
Ordering code	DiMX-CC
Item code	8CH-CAS-DMX
Date	July 2020

## DiMX - Casambi enabled DMX controller

## Controlled by Casambi App



### Description

DiMX is Casambi enabled wireless controller of up to 8 channels DMX-512 dimmer.  
DiMX enables the connection of DMX-512 Master controller to Casambi network.  
DiMX can be also used to be connected directly to DMX controlled fixtures and devices such as Lumemetix CMT and ALM, each device will be controlled individually through the Casambi App  
DiMX supports: RGB/RGBW/Tuneable White/ HSL

### App

DiMX can be controlled and configured by Casambi free App.  
Multiple DiMX devices can be used in the same area/network

### Installation

DiMX can be installed remotely or integrated in a fixtures.  
Dimx work with 12-36VDC class 2 power supply unit.


### Technical Information

Input:	
Power	12-36VDC 35mA
Output	
DMX 512 signal	D+/D-/Ground
Wire Type	14-22AWG
Operating Temp	-20...+45°C
Radio Transceiver	2.401-2.483Ghz

Size (mm)	61x29x13
Size (in)	2.4x1.14x0.5
Weight	20gr

Control Device	iOS device - iPod/iPhone/iPad Android 4.4 or later devices.
----------------	--

Protocols	RGB/W & HSL
Installation	Remote or integrated
Certificates	CE, UL Pending

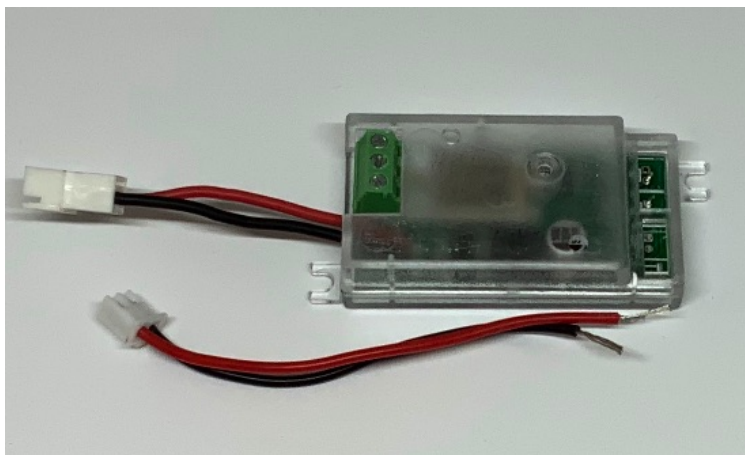

NOTES: DiMX is available with out plastic case - on request.  
Cable connector for input included

We reserve the right to change specifications without prior notification.